

# MATERIAL SPECIFICATION



## AUTOMOTIVE & MARINE - FLEXIBLE CLEAR PVC


### KEY FEATURES

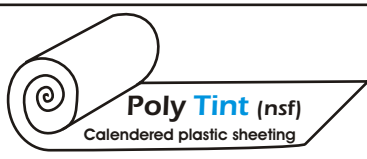



- \*UV stabilised
- \*Non stick Formulation (nsf)
- \*High clarity
- \*Proven field performance
- \*Supported by the DEVLAN warranty

### CARE INSTRUCTIONS

The use of harsh chemicals for cleaning should be avoided, as this can scratch the surface or attack the material. Clear PVC should be cleaned with a diluted solution of mild soap and warm water. Rinse with clean water and dry with a soft cloth or a sponge. Do not use solvents or chemical cleaners. Do not expose sheets to abrasion. The surface can be scratched by rubbing with a coarse cloth or even in general usage, and these are impossible to remove. Some success with slight scratching has been attained with careful use of car polish, but this is not recommended by the manufacturer.

Product	Description & Dimensions	
 <b>Poly clear (nsf)</b> Calendered plastic sheeting	DEVLAN Polyclear (nsf) is manufactured using a calendered process and comes in variety of thicknesses and qualities	
	Thickness	Width
	0.75mm	137cm
	1.00mm	137cm

 <b>Poly Tint (nsf)</b> Calendered plastic sheeting	Similar to polyclear with formulation to reduce glare and heat	
	Thickness	Width
	0.75mm	137cm
	1.00mm	137cm

 <b>Poly Glass (nsf)</b> Extruded plastic sheeting	DEVLAN Polyglass (nsf) is manufactured using a unique extruded manufacturing process to provide a high quality clear used in commercial and marine applications where visual clarity is very important	
	Thickness	Width
	1.00mm	137cm
	1.00mm	183cm